


- NOTES:
- MATERIAL:
 - HOUSING: PPO (UL94V-0)
 - TERMINAL: Cu(COPPER ALLOY)
 - CABLE: Cu INSIDE & PE OUTER JACKET
 - FINISH:
 - TERMINAL PLATING:TIN OVER ALL.
 - TECHNICAL DATA:
 - PIN DIMENSION:ø4.0mm OR ø3.0mm
 - SUITABLE SOLAR CABLE CROSS SECTION:4mm².
 - SUITABLE SOLAR CABLE:AWG 12
 - VOLTAGE RATING: 1000V DC.
 - CURRENT RATING: 8A .
 - POWER RATING: 260W .
 - CONTACT RESISTANCE: <5 mOhm .
 - ENVIRONMENTAL CONDITIONS:
 - PROTECTION CLASS: IP 65, CLASS II.
 - TEMPERATURE RANGE: -40°C TO +85°C.
 - APPROVAL:
 - TUV CERTIFICATION.
 - PART NUMBER:KI-97008-XXX X X - X X 1

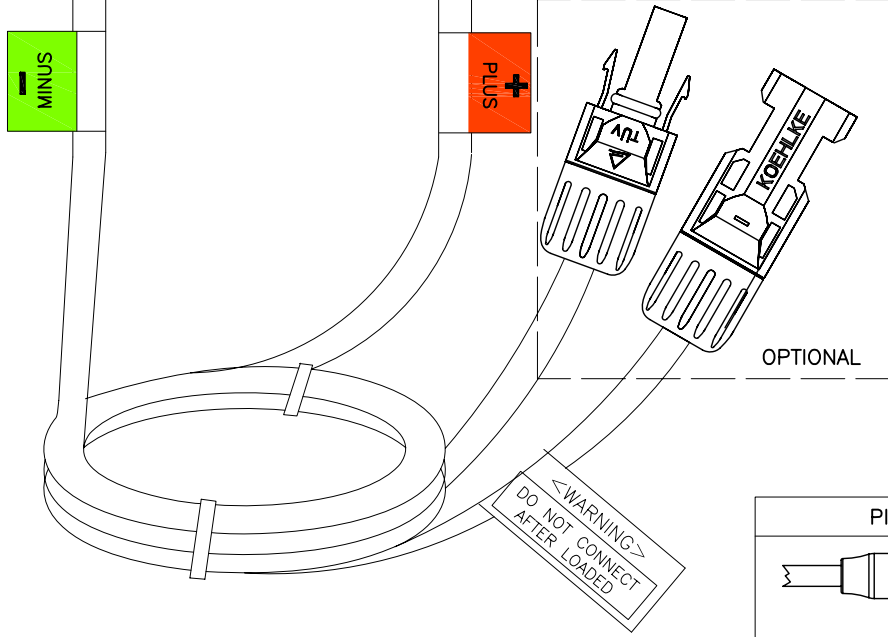

CABLE LENGTH: _____
 000: 0cm
 ...
 999: 999cm
 (STANDARD=90cm)

PACKAGING: _____
 1:BULK 30PCS/CARTON

CABLE OPTION: _____
 1:WITH CABLE
 2:WITHOUT CABLE


CABLE SIZE: _____
 1:2.5mm²
 2:4.0mm²
 3:6.0mm²
 4:AWG 10
 5:AWG 12
 6:AWG 14

PIN DIMENSION: _____
 SEE TABLE

5 DIODES _____

PIN DIMENSION OPTIONAL TABLE

1: PIN DIM. ø3.0	2: PIN DIM. ø4.0

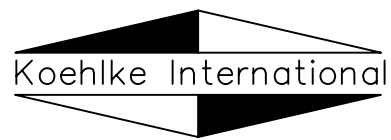

K O E H L K E I N T E R N A T I O N A L